

Triga AW E 1700 \$ × 430 ↔ EX colour: Gold Gloss

Heater MOA IR









Design : Terma

Connections:



Available sizes:

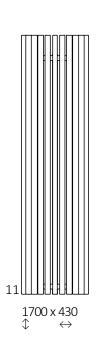

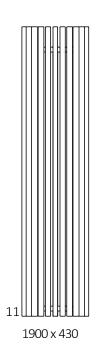

Specification:


A ≎ [mm]	B↔ [mm]	© [W	D [mm]	E [mm]	F [mm]	[dm ³]	(kg]	Product code Configuration code p. 5
1700	430	1200	240	1500	50	14,33	39,47	WLVRA170043
1900	430	1200	240	1700	50	15,93	43,72	WLVRA190043






Technical drawing:

ΕX

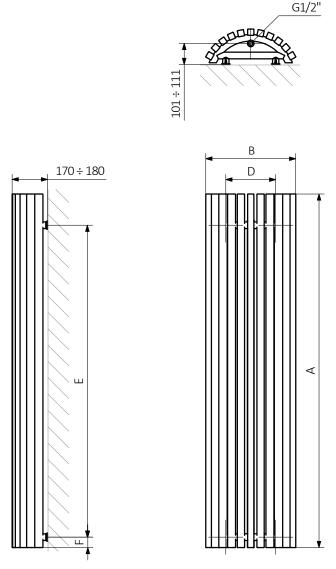

A - Height B - Width C1-C5 - Distance between pipe centres D - Horizontal distance between mounting bracket centres E - Vertical distance between mounting brackets F - Distance between a mounting bracket and the bottom of the radiator



TERMA | www.termaheat.com





In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

Construction of electric heater configuration code:

WLVRA170043

K916EXMRTM

PRODUCT CODE (located in the table for the product) CONFIGURATION CODE (supplemented by hand)

Example Configuration



Package code K - carton box

Package code Colour code Connection code Heating element code Type of heating element cable code

Epoxy primer

E – Code of epoxy primer is an extra processes.

WLVRA170043 K916EX E — Extra processes or additions code





Legend



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.



Available in chrome finish.



No additional payment for a color.