



Angus V $1460 \text{ $\stackrel{$$}{$$}$} \times 520 \Leftrightarrow$ SX colour: RAL 3020

3-axis thermostatic valve set, left, chrome Pipe-masking set, chrome








Design: Artes Design


Standard connection:

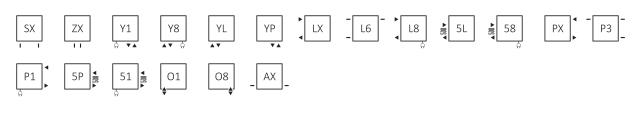



Electric radiators:



Available sizes:









1780 x 680


Specification:

Working pressure: 800 kPa Maximum operating temperature: 95°C

A \$ [mm]	B↔ [mm]	C1 [mm]	C2 [mm]	75 65 20°c [W]	55 45 20°c [W]	(W)	D [mm]	E [mm]	F [mm]	[dm ³]	(kg]	Product code Configuration code p. 14
1140	360	50	320	421	224	400	320	960	90	5,18	11,50	WGANG114036
1300	440	50	400	557	293	600	400	1120	90	6,92	15,36	WGANG130044
1460	520	50	480	711	372	800	480	1280	90	8,88	19,71	WGANG146052
1620	600	50	560	905	472	1000	560	1440	90	11,07	24,57	WGANG162060
1780	680	50	640	1116	580	1200	640	1600	90	13,48	29,92	WGANG178068





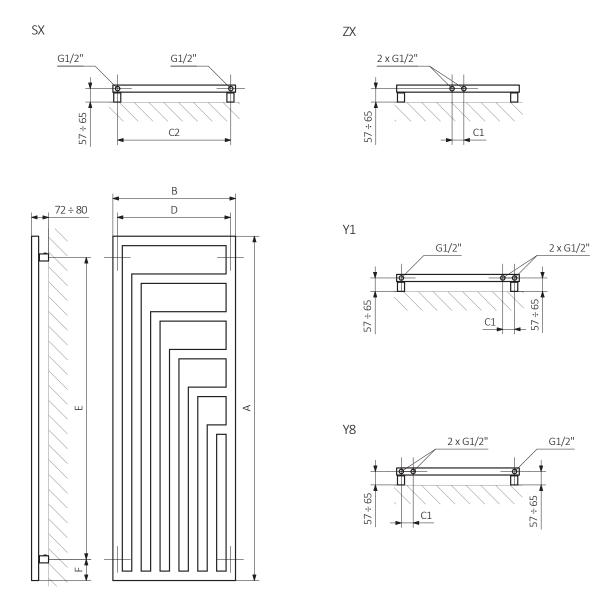










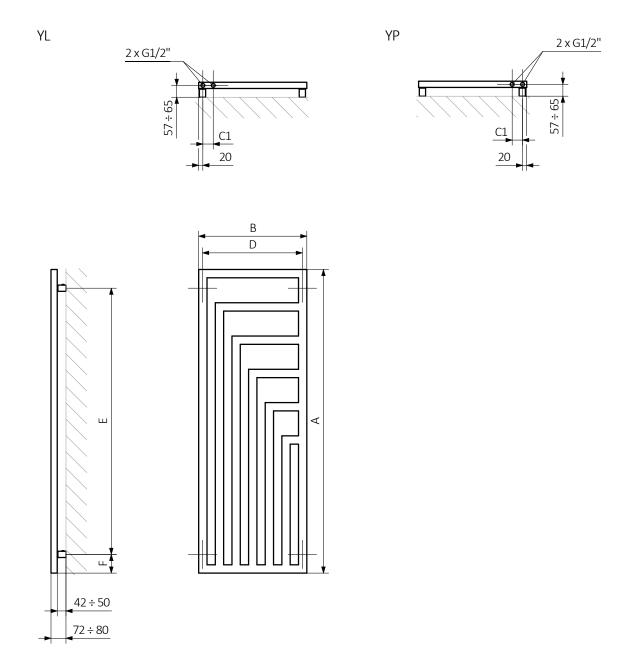










LX

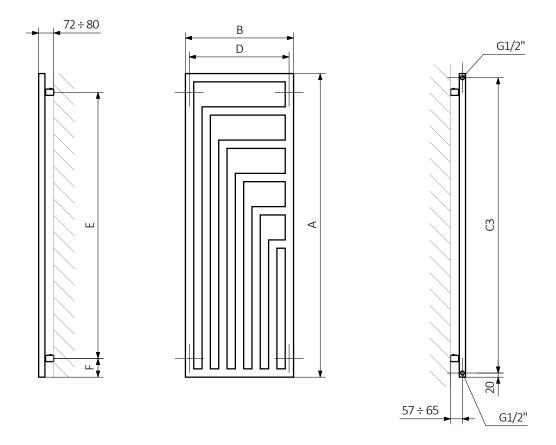

 $\begin{array}{lll} \mathsf{A}-\mathsf{Height} & \mathsf{B}-\mathsf{Width} & \mathsf{C1}\mathsf{-}\mathsf{C5}-\mathsf{Distance} \text{ between pipe centres } & \mathsf{D}-\mathsf{Horizontal} \text{ distance} \text{ between mounting bracket centres} \\ \mathsf{E}-\mathsf{Vertical} \text{ distance} \text{ between mounting brackets } & \mathsf{F}-\mathsf{Distance} \text{ between a mounting bracket} \text{ and the bottom of the radiator} \\ \end{array}$






TERMA | www.termaheat.com





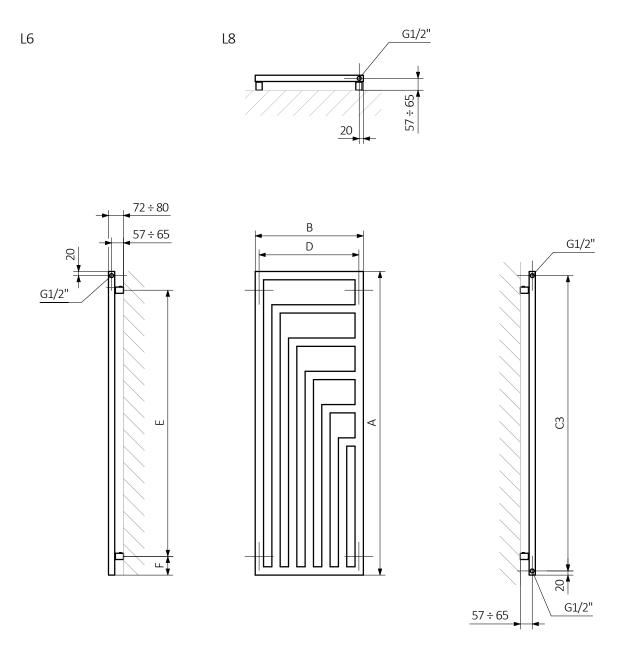










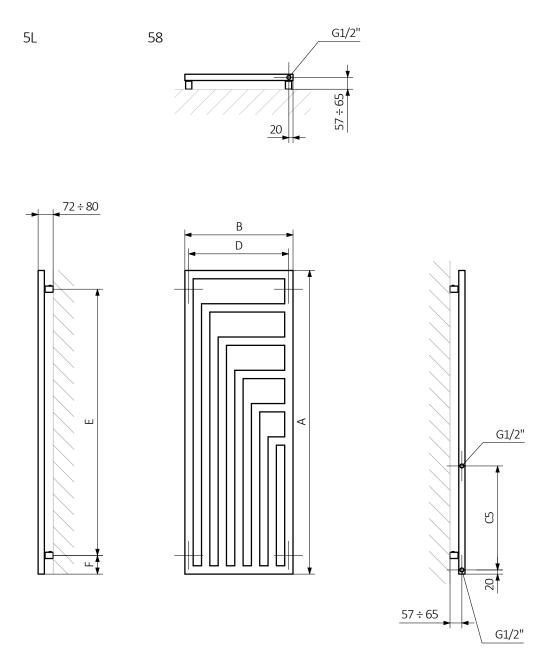










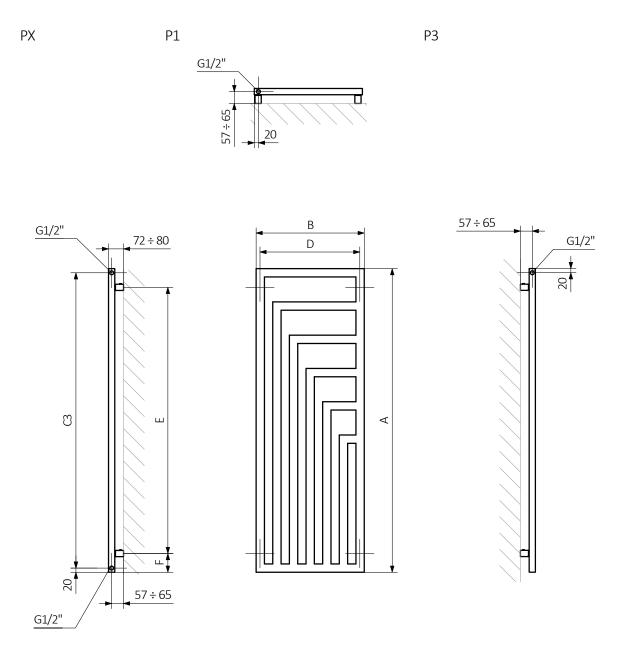










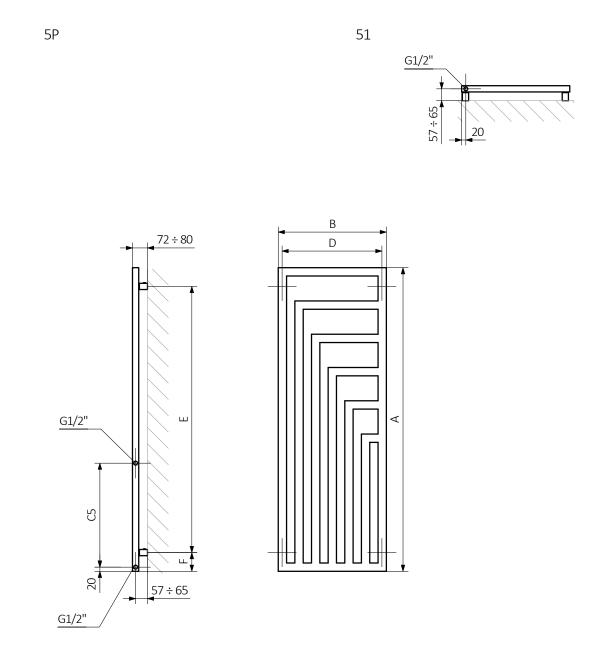










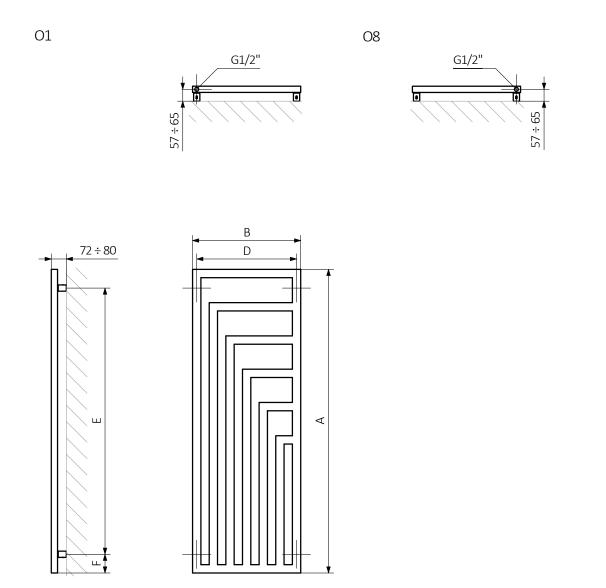










AX

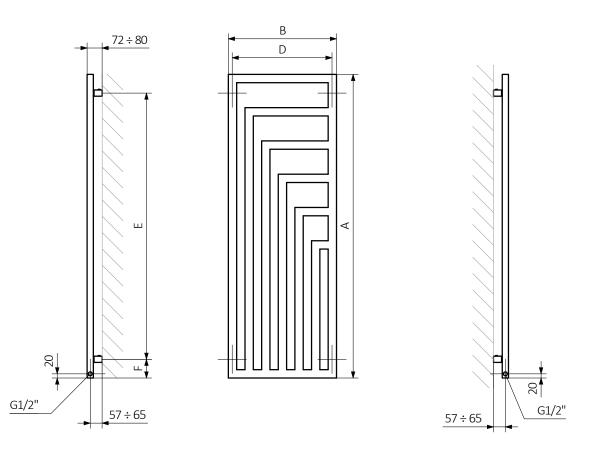

 $\begin{array}{lll} \mathsf{A}-\mathsf{Height} & \mathsf{B}-\mathsf{Width} & \mathsf{C1}\mathsf{-}\mathsf{C5}-\mathsf{Distance} \text{ between pipe centres } & \mathsf{D}-\mathsf{Horizontal} \text{ distance} \text{ between mounting bracket centres} \\ \mathsf{E}-\mathsf{Vertical} \text{ distance} \text{ between mounting brackets } & \mathsf{F}-\mathsf{Distance} \text{ between a mounting bracket} \text{ and the bottom of the radiator} \\ \end{array}$

Pipe:








Ð

Technical drawing:

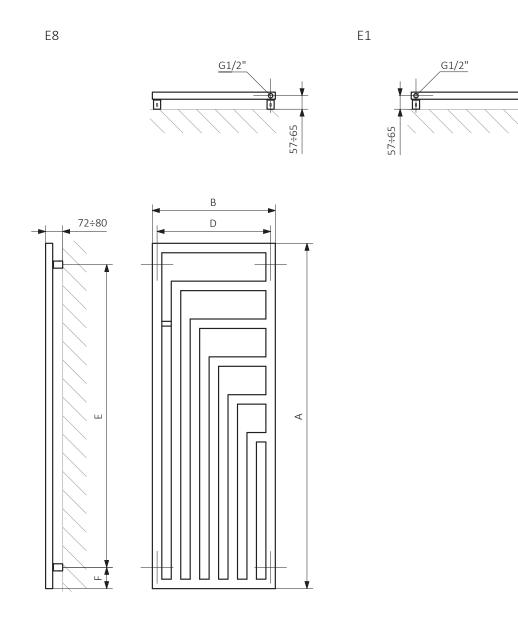

 $\begin{array}{lll} \mathsf{A}-\mathsf{Height} & \mathsf{B}-\mathsf{Width} & \mathsf{C1}\mathsf{-}\mathsf{C5}-\mathsf{Distance} \text{ between pipe centres } & \mathsf{D}-\mathsf{Horizontal} \text{ distance} \text{ between mounting bracket centres} \\ \mathsf{E}-\mathsf{Vertical} \text{ distance} \text{ between mounting brackets } & \mathsf{F}-\mathsf{Distance} \text{ between a mounting bracket} \text{ and the bottom of the radiator} \\ \end{array}$

Pipe:







In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

The construction of a water and dual fuel radiator product and configuration code

K916SX

WGANG114036

PRODUCT CODE (located in the table for the product)

CONFIGURATION CODE (supplemented by hand)

Example Configuration



Construction of electric heater configuration code:

WLANG114036

K916E1DRYM

PRODUCT CODE (located in the table for the product) CONFIGURATION CODE (supplemented by hand)

Example Configuration



Epoxy primer


E – Code of epoxy primer is an extra processes.

WGANG114036 K916SX E Extraprocesses or additions code





Legend

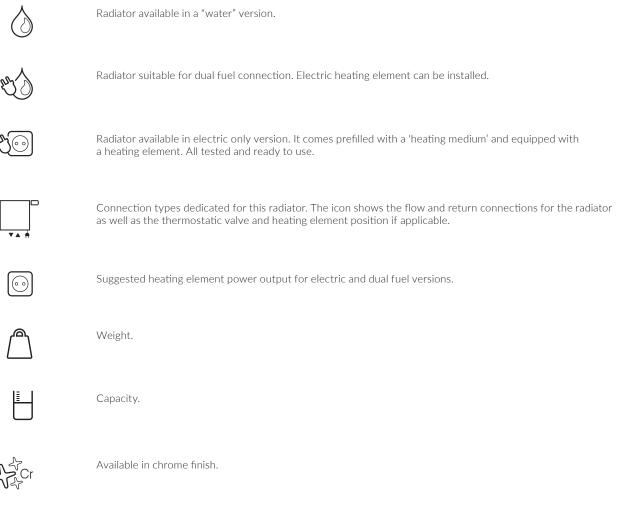



No additional payment for a color.