


# Plain

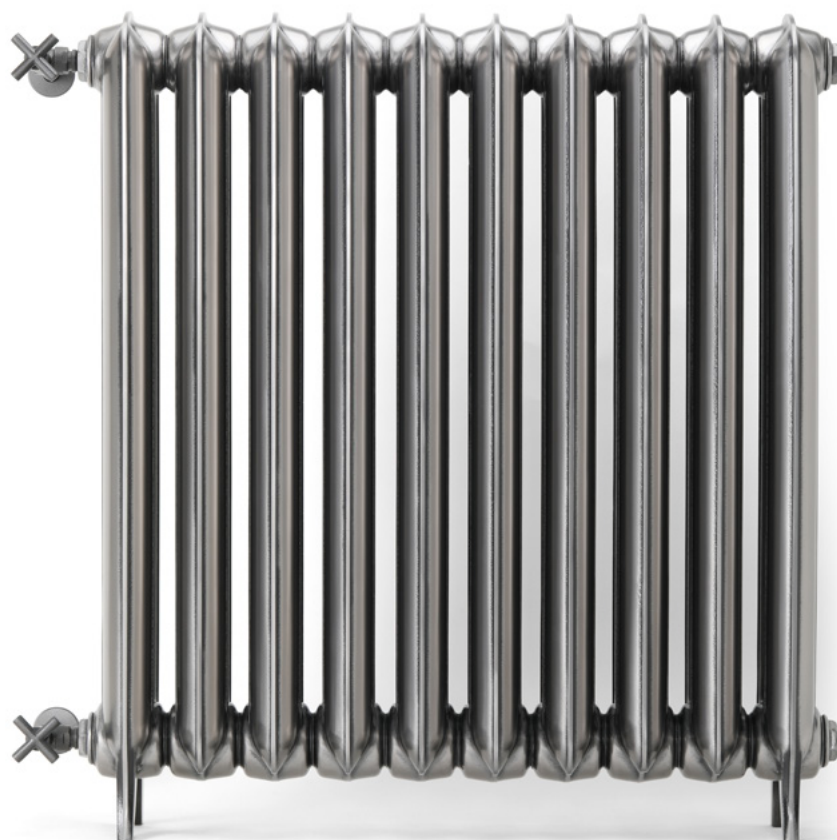

## Radiator

Free standing Plain 920↑ x 852↔ LP, colour: polished metal

## Valves and accessories

Angled regulating valve set Minimalist, anthracite

Pipe cover and shroud set – 160 mm, anthracite

# Plain



**TERMA**

SINCE 1990






## Standard connections:



## Available sizes:


Wall mounted

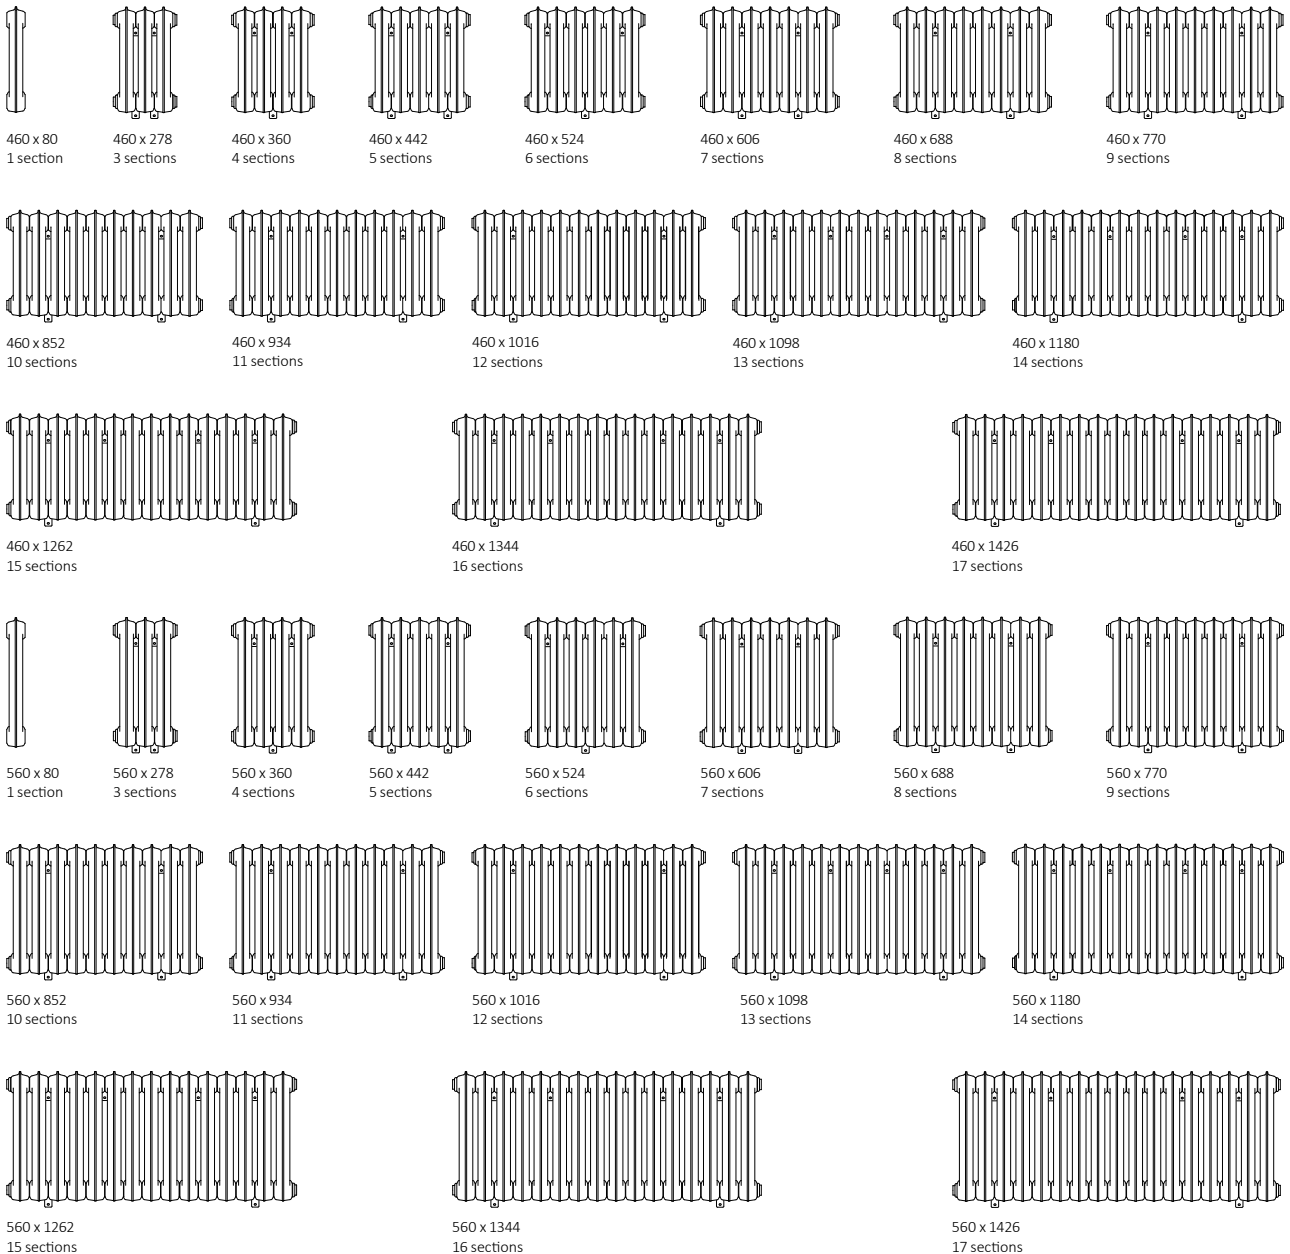


# Plain




660 x 80  
1 section




660 x 278  
3 sections




660 x 360  
4 sections




660 x 442  
5 sections




660 x 524  
6 sections




660 x 606  
7 sections




660 x 688  
8 sections




660 x 770  
9 sections




660 x 852  
10 sections




660 x 934  
11 sections




660 x 1016  
12 sections




660 x 1098  
13 sections




660 x 1180  
14 sections



660 x 1262  
15 sections




660 x 1344  
16 sections

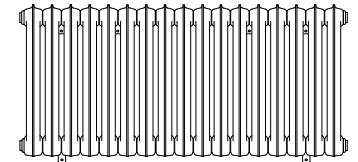


660 x 1426  
17 sections




860 x 80  
1 section




860 x 278  
3 sections




860 x 360  
4 sections




860 x 442  
5 sections




860 x 524  
6 sections




860 x 606  
7 sections




860 x 688  
8 sections




860 x 770  
9 sections




860 x 852  
10 sections




860 x 934  
11 sections




860 x 1016  
12 sections




860 x 1098  
13 sections




860 x 1180  
14 sections



860 x 1262  
15 sections



860 x 1344  
16 sections

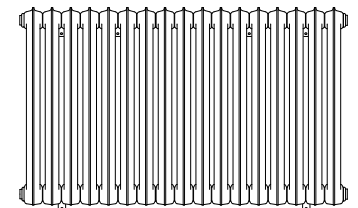


860 x 1426  
17 sections


# Plain




## Free standing

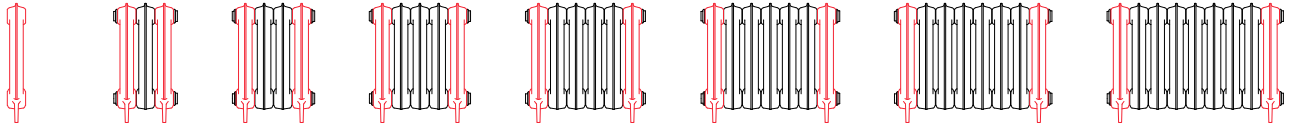


520 x 80 1 section (1)    520 x 278 3 sections (2+1)    520 x 360 4 sections (2+2)    520 x 442 5 sections (2+3)    520 x 524 6 sections (2+4)    520 x 606 7 sections (2+5)    520 x 688 8 sections (2+6)    520 x 770 9 sections (2+7)

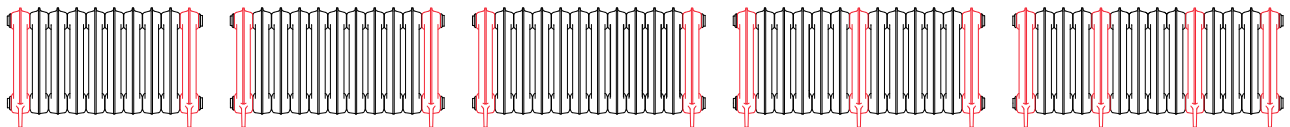


520 x 852 10 sections (2+8)    520 x 934 11 sections (2+9)    520 x 1016 12 sections (2+10)    520 x 1098 13 sections (3+10)    520 x 1180 14 sections (4+10)

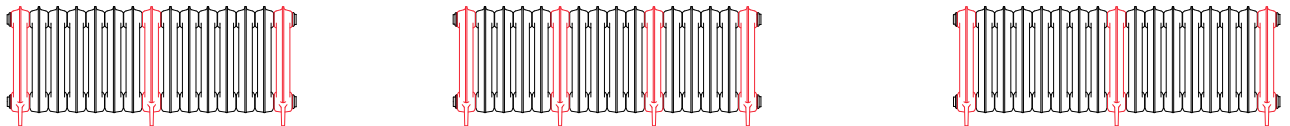


520 x 1262 15 sections (3+12)    520 x 1344 16 sections (4+12)    520 x 1426 17 sections (3+14)

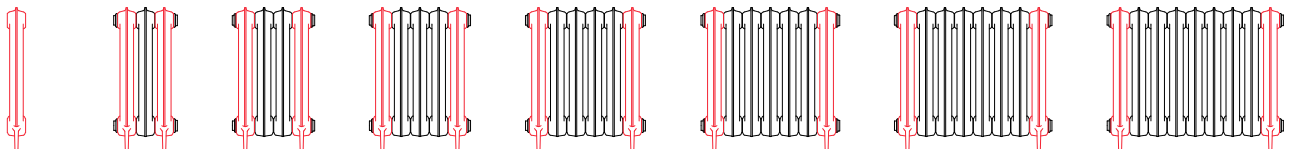

620 x 80 1 section (1)    620 x 278 3 sections (2+1)    620 x 360 4 sections (2+2)    620 x 442 5 sections (2+3)    620 x 524 6 sections (2+4)    620 x 606 7 sections (2+5)    620 x 688 8 sections (2+6)    620 x 770 9 sections (2+7)

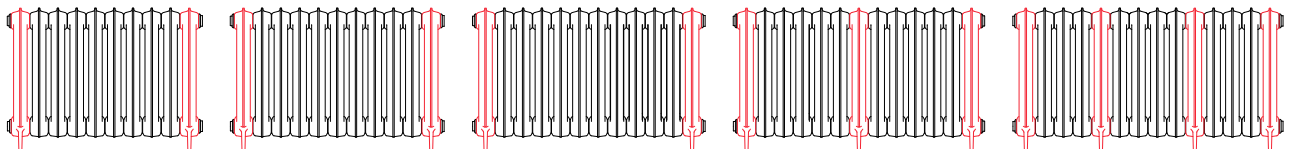


620 x 852 10 sections (2+8)    620 x 934 11 sections (2+9)    620 x 1016 12 sections (2+10)    620 x 1098 13 sections (3+10)    620 x 1180 14 sections (4+10)

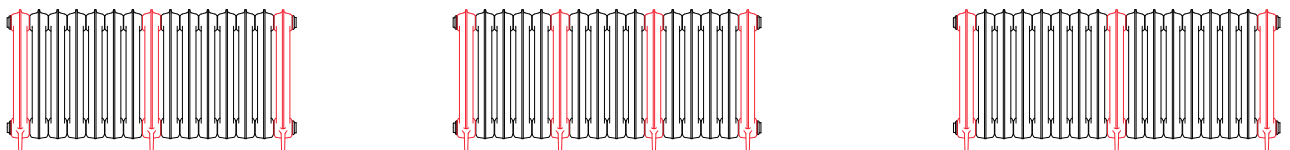


620 x 1262 15 sections (3+12)    620 x 1344 16 sections (4+12)    620 x 1426 17 sections (3+14)


# Plain

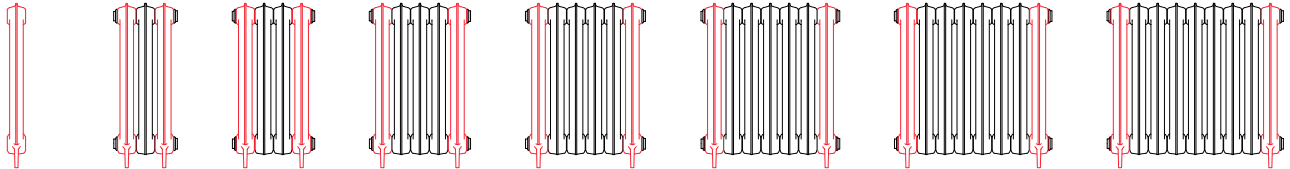


720 x 80 1 section (1)    720 x 278 3 sections (2+1)    720 x 360 4 sections (2+2)    720 x 442 5 sections (2+3)    720 x 524 6 sections (2+4)    720 x 606 7 sections (2+5)    720 x 688 8 sections (2+6)    720 x 770 9 sections (2+7)

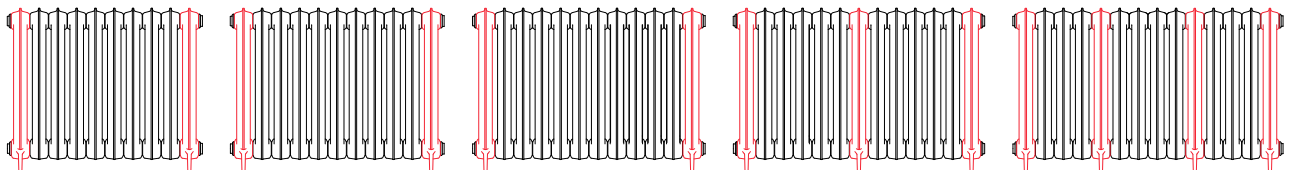


720 x 852 10 sections (2+8)    720 x 934 11 sections (2+9)    720 x 1016 12 sections (2+10)    720 x 1098 13 sections (3+10)    720 x 1180 14 sections (4+10)

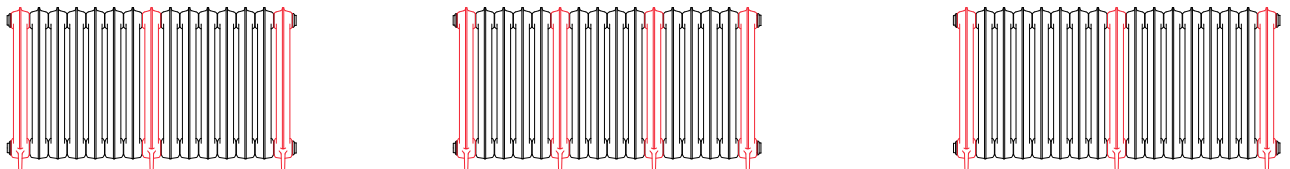


720 x 1262 15 sections (3+12)    720 x 1344 16 sections (4+12)    720 x 1426 17 sections (3+14)

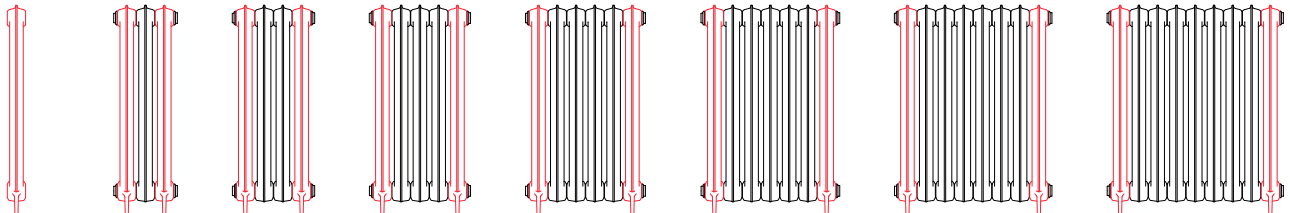

920 x 80 1 section (1)    920 x 278 3 sections (2+1)    920 x 360 4 sections (2+2)    920 x 442 5 sections (2+3)    920 x 524 6 sections (2+4)    920 x 606 7 sections (2+5)    920 x 688 8 sections (2+6)    920 x 770 9 sections (2+7)

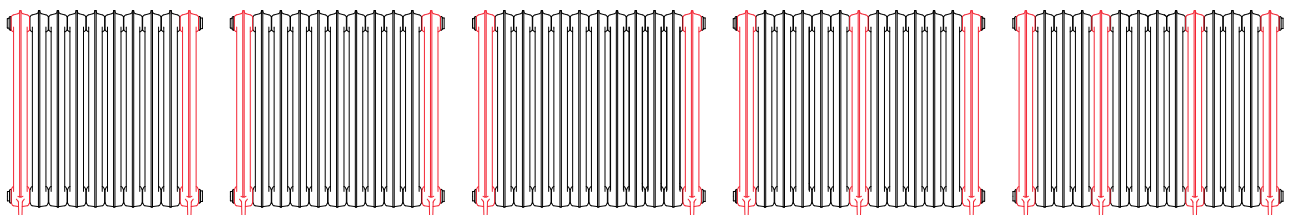

920 x 852 10 sections (2+8)    920 x 934 11 sections (2+9)    920 x 1016 12 sections (2+10)    920 x 1098 13 sections (3+10)    920 x 1180 14 sections (4+10)

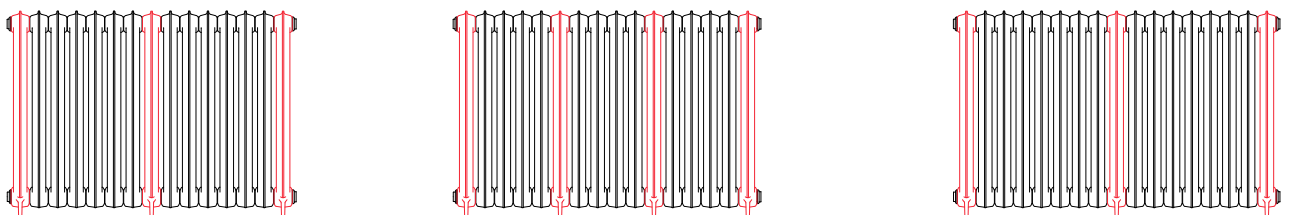

920 x 1262 15 sections (3+12)    920 x 1344 16 sections (4+12)    920 x 1426 17 sections (3+14)



## Specifications:

Working pressure: 1000 kPa    Maximum operating temperature: 95°C

A ↓ [mm]	B ↔ [mm]	C1 [mm]	75/65/20°C [W]	55/45/20°C [W]	D [mm]	D1 [mm]	D2 [mm]	H [dm³]	[kg]	Product code <small>(Configuration code p. 12)</small>
<b>Wall mounted</b>										
460	80	360	86	46	—	—	—	2,13	7,30	WGPLB046008
460	278	360	259	137	82	98	—	6,38	23,00	WGPLB046027
460	360	360	345	183	—	98	—	8,50	30,30	WGPLB046036
460	442	360	432	228	246	98	—	10,63	37,60	WGPLB046044
460	524	360	518	274	—	98	—	12,75	44,90	WGPLB046052
460	606	360	604	320	246	180	—	14,88	52,20	WGPLB046060
460	688	360	690	365	328	180	—	17,01	59,50	WGPLB046068
460	770	360	777	411	410	180	—	19,13	66,80	WGPLB046077
460	852	360	863	457	492	180	—	21,26	74,10	WGPLB046085
460	934	360	949	503	574	180	—	23,38	81,40	WGPLB046093
460	1016	360	1036	548	656	180	—	25,51	88,70	WGPLB046101
460	1098	360	1122	594	738	180	246	27,63	96,00	WGPLB046109
460	1180	360	1208	640	820	180	246	29,76	103,30	WGPLB046118
460	1262	360	1295	685	902	180	246	31,89	110,60	WGPLB046126
460	1344	360	1381	731	984	180	246	34,01	117,90	WGPLB046134
460	1426	360	1467	777	1066	180	246	36,14	125,20	WGPLB046142
560	80	460	103	54	—	—	—	2,61	8,90	WGPLB056008
560	278	460	308	163	82	98	—	7,82	23,00	WGPLB056027
560	360	460	410	217	—	98	—	10,42	30,30	WGPLB056036
560	442	460	513	271	246	98	—	13,03	37,60	WGPLB056044
560	524	460	615	325	—	98	—	15,63	44,90	WGPLB056052
560	606	460	718	379	246	180	—	18,24	52,20	WGPLB056060
560	688	460	820	434	328	180	—	20,85	59,50	WGPLB056068
560	770	460	923	488	410	180	—	23,45	66,80	WGPLB056077
560	852	460	1025	542	492	180	—	26,06	74,10	WGPLB056085
560	934	460	1128	596	574	180	164	28,66	81,40	WGPLB056093
560	1016	460	1230	650	656	180	164	31,27	88,70	WGPLB056101
560	1098	460	1333	705	738	180	246	33,87	96,00	WGPLB056109
560	1180	460	1435	759	820	180	246	36,48	103,30	WGPLB056118
560	1262	460	1538	813	902	180	246	39,09	110,60	WGPLB056126
560	1344	460	1640	867	984	180	246	41,69	117,90	WGPLB056134
560	1426	460	1743	921	1066	180	246	44,30	125,20	WGPLB056142
660	80	560	124	66	—	—	—	3,05	9,50	WGPLB066008
660	278	560	372	198	82	98	—	9,16	29,60	WGPLB066027
660	360	560	496	265	—	98	—	12,21	39,10	WGPLB066036
660	442	560	620	331	246	98	—	15,27	48,60	WGPLB066044
660	524	560	744	397	—	98	—	18,32	58,10	WGPLB066052



A ↓ [mm]	B ↔ [mm]	C1 [mm]	75/65/20°C [W]	55/45/20°C [W]	D [mm]	D1 [mm]	D2 [mm]	H [dm³]	W [kg]	Product code <small>(Configuration code p. 12)</small>
660	606	560	868	463	246	180	—	21,37	67,60	WGPLB066060
660	688	560	992	529	328	180	—	24,42	77,10	WGPLB066068
660	770	560	1116	595	410	180	—	27,48	86,60	WGPLB066077
660	852	560	1240	661	492	180	—	30,53	96,10	WGPLB066085
660	934	560	1364	728	574	180	164	33,58	105,60	WGPLB066093
660	1016	560	1488	794	656	180	164	36,64	115,10	WGPLB066101
660	1098	560	1612	860	738	180	246	39,69	124,60	WGPLB066109
660	1180	560	1736	926	820	180	246	42,74	134,10	WGPLB066118
660	1262	560	1860	992	902	180	246	45,80	143,60	WGPLB066126
660	1344	560	1984	1058	984	180	246	48,85	153,10	WGPLB066134
660	1426	560	2108	1124	1066	180	246	51,90	162,60	WGPLB066142
860	80	760	149	80	—	—	—	4,14	11,70	WGPLB086008
860	278	760	447	239	82	98	—	12,42	36,20	WGPLB086027
860	360	760	596	318	—	98	—	16,56	47,90	WGPLB086036
860	442	760	745	398	246	98	—	20,70	59,60	WGPLB086044
860	524	760	894	477	—	98	—	24,84	71,30	WGPLB086052
860	606	760	1043	557	246	180	—	28,98	83,00	WGPLB086060
860	688	760	1192	636	328	180	—	33,12	94,70	WGPLB086068
860	770	760	1341	716	410	180	—	37,26	106,40	WGPLB086077
860	852	760	1490	795	492	180	—	41,40	118,10	WGPLB086085
860	934	760	1639	875	574	180	164	45,54	129,80	WGPLB086093
860	1016	760	1788	954	656	180	164	49,68	141,50	WGPLB086101
860	1098	760	1937	1034	738	180	246	53,82	153,20	WGPLB086109
860	1180	760	2086	1113	820	180	246	57,96	164,90	WGPLB086118
860	1262	760	2235	1193	902	180	246	62,10	176,60	WGPLB086126
860	1344	760	2384	1272	984	180	246	66,24	188,30	WGPLB086134
860	1426	760	2533	1352	1066	180	246	70,38	200,00	WGPLB086142
<b>Free standing</b>										
520	80	360	86	46	—	—	—	2,13	7,70	WGPLF052008
520	278	360	259	137	—	—	—	6,38	23,80	WGPLF052027
520	360	360	345	183	—	—	—	8,50	31,10	WGPLF052036
520	442	360	432	228	—	—	—	10,63	38,40	WGPLF052044
520	524	360	518	274	—	—	—	12,75	45,70	WGPLF052052
520	606	360	604	320	—	—	—	14,88	53,00	WGPLF052060
520	688	360	690	365	—	—	—	17,01	60,30	WGPLF052068
520	770	360	777	411	—	—	—	19,13	67,60	WGPLF052077
520	852	360	863	457	—	—	—	21,26	74,90	WGPLF052085
520	934	360	949	503	—	—	—	23,38	82,20	WGPLF052093
520	1016	360	1036	548	—	—	—	25,51	89,50	WGPLF052101
520	1098	360	1122	594	—	—	—	27,63	97,20	WGPLF052109
520	1180	360	1208	640	—	—	—	29,76	104,90	WGPLF052118




# Plain



A ↓ [mm]	B ↔ [mm]	C1 [mm]	75/65/20°C [W]	55/45/20°C [W]	D [mm]	D1 [mm]	D2 [mm]	H [dm³]	W [kg]	Product code <small>(Configuration code p. 12)</small>
520	1262	360	1295	685	–	–	–	31,89	111,80	WGPLF052126
520	1344	360	1381	731	–	–	–	34,01	119,50	WGPLF052134
520	1426	360	1467	777	–	–	–	36,14	126,40	WGPLF052142
620	80	460	103	54	–	–	–	2,61	9,30	WGPLF062008
620	278	460	308	163	–	–	–	7,82	27,50	WGPLF062027
620	360	460	410	217	–	–	–	10,42	36,40	WGPLF062036
620	442	460	513	271	–	–	–	13,03	45,30	WGPLF062044
620	524	460	615	325	–	–	–	15,63	54,20	WGPLF062052
620	606	460	718	379	–	–	–	18,24	63,10	WGPLF062060
620	688	460	820	434	–	–	–	20,85	72,00	WGPLF062068
620	770	460	923	488	–	–	–	23,45	80,90	WGPLF062077
620	852	460	1025	542	–	–	–	26,06	89,80	WGPLF062085
620	934	460	1128	596	–	–	–	28,66	98,70	WGPLF062093
620	1016	460	1230	650	–	–	–	31,27	107,60	WGPLF062101
620	1098	460	1333	705	–	–	–	33,87	116,90	WGPLF062109
620	1180	460	1435	759	–	–	–	36,48	126,20	WGPLF062118
620	1262	460	1538	813	–	–	–	39,09	134,70	WGPLF062126
620	1344	460	1640	867	–	–	–	41,69	144,00	WGPLF062134
620	1426	460	1743	921	–	–	–	44,30	152,50	WGPLF062142
720	80	560	124	66	–	–	–	3,05	10,10	WGPLF072008
720	278	560	372	198	–	–	–	9,16	30,80	WGPLF072027
720	360	560	496	265	–	–	–	12,21	40,30	WGPLF072036
720	442	560	620	331	–	–	–	15,27	49,80	WGPLF072044
720	524	560	744	397	–	–	–	18,32	59,30	WGPLF072052
720	606	560	868	463	–	–	–	21,37	68,80	WGPLF072060
720	688	560	992	529	–	–	–	24,42	78,30	WGPLF072068
720	770	560	1116	595	–	–	–	27,48	87,80	WGPLF072077
720	852	560	1240	661	–	–	–	30,53	97,30	WGPLF072085
720	934	560	1364	728	–	–	–	33,58	106,80	WGPLF072093
720	1016	560	1488	794	–	–	–	36,64	116,30	WGPLF072101
720	1098	560	1612	860	–	–	–	39,69	126,40	WGPLF072109
720	1180	560	1736	926	–	–	–	42,74	136,50	WGPLF072118
720	1262	560	1860	992	–	–	–	45,80	145,40	WGPLF072126
720	1344	560	1984	1058	–	–	–	48,85	155,50	WGPLF072134
720	1426	560	2108	1124	–	–	–	51,90	164,40	WGPLF072142
920	80	760	149	80	–	–	–	4,14	12,50	WGPLF092008
920	278	760	447	239	–	–	–	12,42	37,80	WGPLF092027
920	360	760	596	318	–	–	–	16,56	49,50	WGPLF092036
920	442	760	745	398	–	–	–	20,70	61,20	WGPLF092044
920	524	760	894	477	–	–	–	24,84	72,90	WGPLF092052
920	606	760	1043	557	–	–	–	28,98	84,60	WGPLF092060

# Plain




A ↓ [mm]	B ↔ [mm]	C1 [mm]	75/65/20°C [W]	55/45/20°C [W]	D [mm]	D1 [mm]	D2 [mm]	 [dm <sup>3</sup> ]	 [kg]	Product code <small>(Configuration code p. 12)</small>
920	688	760	1192	636	–	–	–	33,12	96,30	WGPLF092068
920	770	760	1341	716	–	–	–	37,26	108,00	WGPLF092077
920	852	760	1490	795	–	–	–	41,40	119,70	WGPLF092085
920	934	760	1639	875	–	–	–	45,54	132,20	WGPLF092093
920	1016	760	1788	954	–	–	–	49,68	144,70	WGPLF092101
920	1098	760	1937	1034	–	–	–	53,82	155,60	WGPLF092109
920	1180	760	2086	1113	–	–	–	57,96	168,10	WGPLF092118
920	1262	760	2235	1193	–	–	–	62,10	179,00	WGPLF092126
920	1344	760	2384	1272	–	–	–	66,24	191,50	WGPLF092134
920	1426	760	2533	1352	–	–	–	70,38	202,40	WGPLF092142

Radiators made up of 13 sections and more are delivered in two or more batteries.


# Plain



Wall mounted

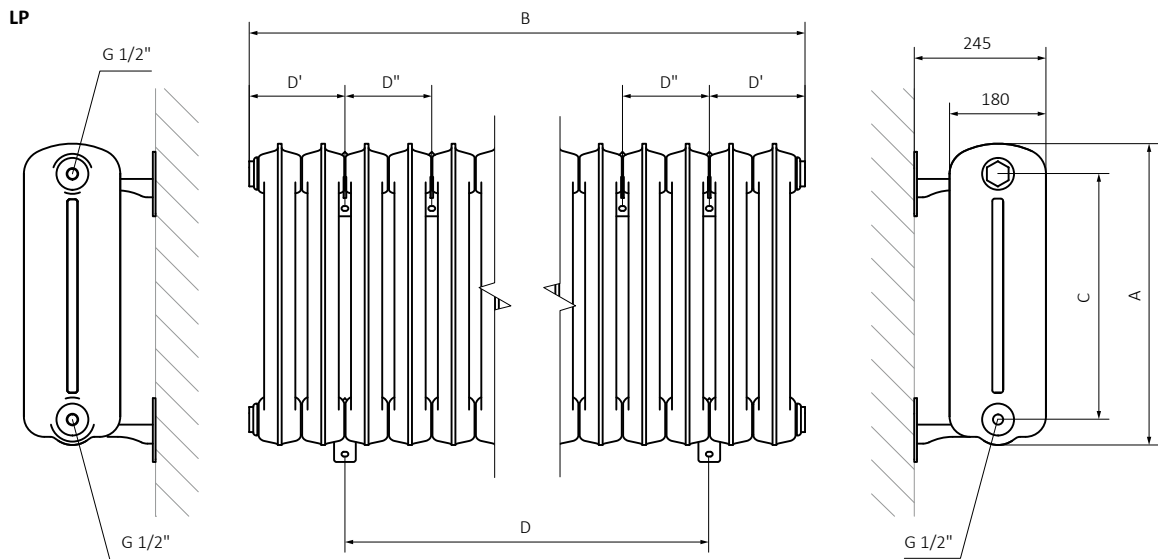

Free standing

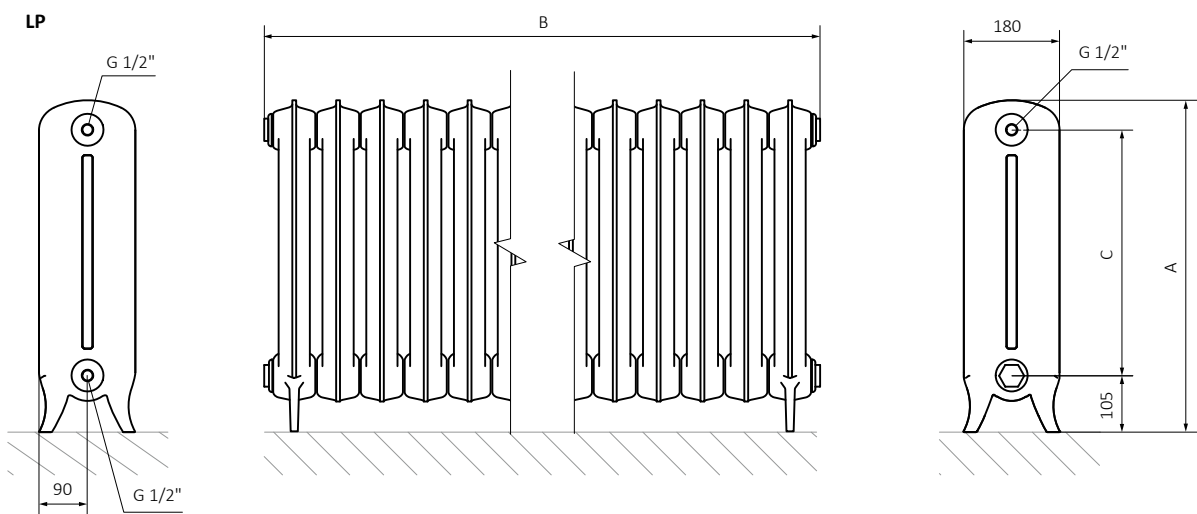

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres



## Structure of configuration code for water and dual fuel radiators

Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

### Code structure

WGPLF092085

PRODUCT CODE  
(located in the table for the product)

L916LP

CONFIGURATION CODE  
(supplemented by hand)

### Configuration

